

DEVELOP

Dynamic balance


www.develop.eu




ineo 758



- > Black & white
A3 multifunctional
- > Up to 75 ppm

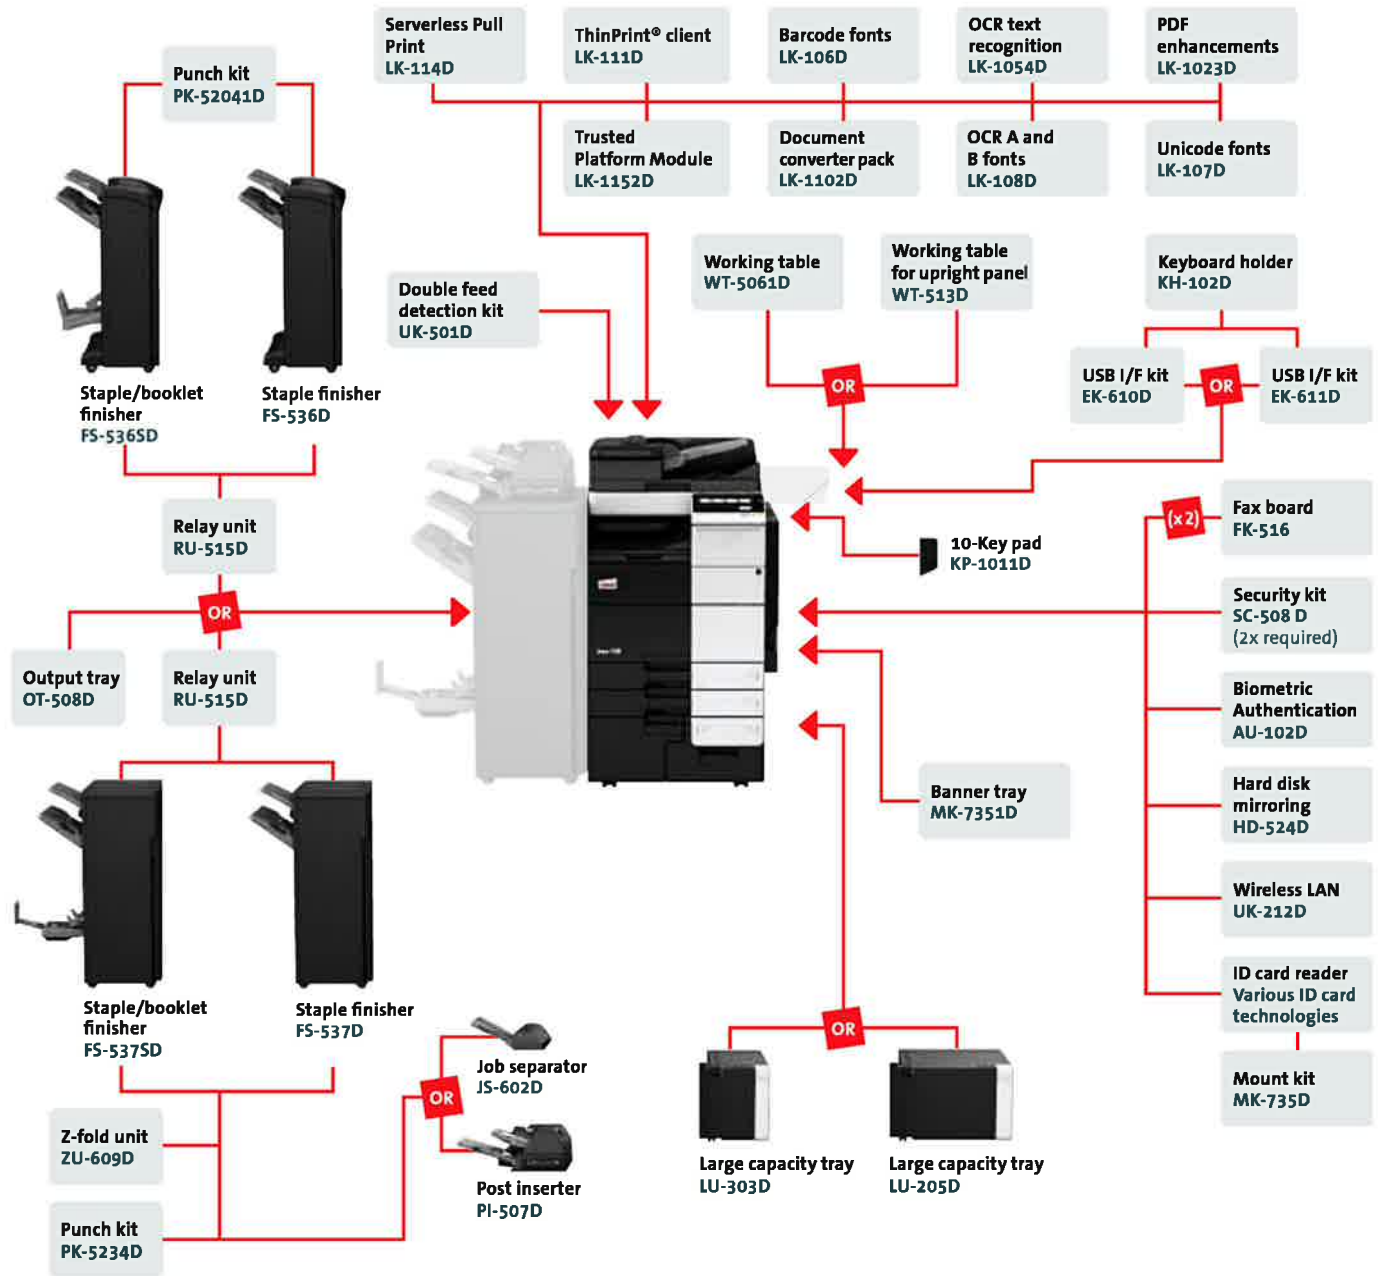

Finishing functionalities

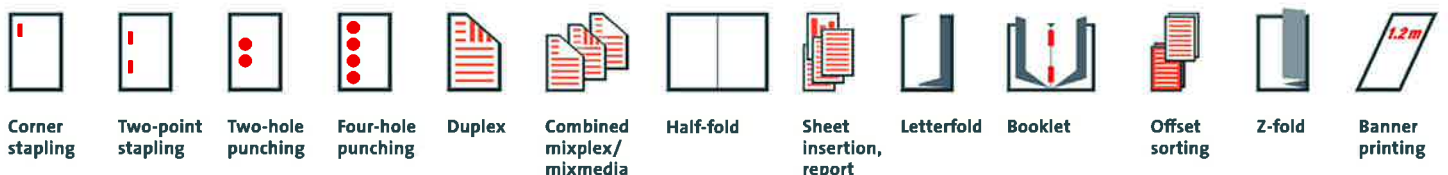

ineo 758

A3 multifunctional with 75 ppm b/w. Standard ineo controller with PCL 6, PCL 5, PostScript 3, PDF 1.7, XPS and OOXML support. Paper capacity of 500 + 500 + 1,000 + 1,500 sheets and 150-sheet manual bypass. Media from A6 to SRA3, 1.2 m banner and 52–300 g/m². 4 GB memory, 250 GB hard disk and Gigabit Ethernet standard.

LU-205D Large capacity tray	A4–SRA3, 2,500 sheets, 52–256 g/m ²
LU-303D Large capacity tray	A4, 3,000 sheets, 52–256 g/m ²
FS-536D Staple finisher	50-sheet stapling, 3,200 sheets max. output
FS-536SD Booklet finisher	50-sheet staple finisher, 20-sheet booklet finisher, 2,200 sheets max. output
RU-515D Relay unit for FS-536D(SD)/FS-537D(SD)	For FS-536(SD)/FS-537(SD) installation
PK-52041D Punch kit for FS-536D(SD)	2/4 hole punching, autoswitching
FS-537D Staple finisher	100 sheets stapling, 3,200 sheets max. output
PK-5234D Punch kit for FS-537D(SD)	2/4 hole punching, autoswitching
FS-537SD	Booklet finisher, 100-sheet staple finisher, 20-sheet booklet finisher, 2,700 sheets max. output
PI-507D Post inserter for FS-537D(SD)	Cover insertion, post finishing
JS-602D Job separator for FS-537D(SD)	Separation of fax output, etc.
ZU-609D Z-fold unit for FS-537D(SD)	Z-fold for A3 prints
OT-508D Output tray	Output tray used instead of finisher
KP-1011D 10-Key pad	For use instead of touchscreen

WT-5061D Working table	Authentication device placement
FK-516D Fax board	Super G3 fax, digital fax functionality
KH-102D Keyboard holder	To place USB keyboard
EK-610D USB I/F kit	USB keyboard connection
EK-611D USB I/F kit	USB keyboard connection, Bluetooth
ID card reader	Various ID card technologies
MK-735D Mount kit	Installation kit for ID card reader
AU-102D	Finger vein scanner
Biometric authentication	
SC-508D Security kit	Copy guard function
MK-7351D Banner tray	Multi-page banner feeding
LK-1023D PDF enhancements	PDF/A, PDF encryption, digital signature
LK-1054D	Searchable PDF and PPTX
OCR text recognition	
LK-106D Barcode fonts	Supports native barcode printing
LK-107D Unicode fonts	Supports native Unicode printing
LK-108D OCR A and B fonts	Supports native OCR A and B font printing
LK-1102D	Generates various file formats incl. DOCX, XLSX and PDF/A
Document converter pack	
LK-111D ThinPrint® Client	Print data compression for reduced network impact
LK-1152D TPM activation	Trusted Platform Module for protection of data encryption and decryption
WT-513D Working table	Working table for upright panel
UK-501D	Multi-feed detector to reduce errors and paper jams
Double feed detection kit	
HD-524D Hard disk mirroring	Back-up HDD
UK-212D Wireless LAN	Wireless LAN and wireless LAN Access Point Mode

Technical specifications

SYSTEM SPECIFICATIONS

System memory	4,096 MB
System hard disk	250 GB
Interface	10-Base-T/100-Base-T/1,000-Base-T Ethernet; USB 2.0; Wi-Fi 802.11b/g (optional)
Network protocols	TCP/IP (IPv4 / IPv6); NetBEUI; SMB; LPD; IPP; SNMP; HTTP
Frame types	Ethernet 802.2; Ethernet 802.3; Ethernet II; Ethernet SNAP
Automatic document feeder	Up to 300 originals; A6–A3; 35–210 g/m ² ; Dual scan ADF
Printable paper size	A6–SRA3, customised paper sizes; banner paper max. 1,200 x 297 mm
Printable paper weight	52–300 g/m ²
Paper input capacity	Standard: 3,650 sheets Max.: 6,650 sheets
Tray 1	500 sheets, A5–SRA3, 52–256 g/m ²
Tray 2	500 sheets, A5–SRA3, 52–256 g/m ²
Tray 3	1,500 sheets, A4, 52–256 g/m ²
Tray 4	1,000 sheets, A4, 52–256 g/m ²
Large capacity tray LU-303 (optional)	3,000 sheets, A4, 52–256 g/m ²
Large capacity tray LU-205 (optional)	2,500 sheets, A4–SRA3, 52–256 g/m ²
Manual bypass	150 sheets, A6–SRA3, custom sizes, banner, 52–300 g/m ²
Automatic duplexing	A5–SRA3; 52–256 g/m ²
Finishing modes (optional)	Offset; group; sort; staple; punch; post insertion; z-fold; centre-fold; letter fold; booklet
Output capacity (with finisher)	Max.: 3,200 sheets
Output capacity (without finisher)	Max.: 250 sheets
Stapling	Max.: 100 sheets or 94 sheets + 2 cover sheets (up to 209 g/m ²)
Stapling output capacity	Max.: 1,000 sheets
Letter fold	Up to 3 sheets
Letter fold capacity	Max.: 30 sheets (tray); unlimited

Booklet	Max.: 20 sheets or 19 sheets + 1 cover sheet (up to 209 g/m ²)
Booklet output capacity	Max.: 100 sheets (tray); unlimited
Copy/print volume (monthly)	Rec.: 80,000 pages; Max. ⁽¹⁾ : 215,000 pages
Toner lifetime	40,800 pages
Imaging unit lifetime	400,000 pages/1,200,000 pages (Drum/Developer)
Power consumption	220–240 V / 50/60 Hz; less than 2.1 kW (system)
System dimensions (W x D x H)	670 x 820 x 1,232 mm
System weight	Approx. 200 kg

COPIER SPECIFICATIONS

Copying process	Electrostatic laser copy; tandem; indirect
Toner system	HD polymerised toner
Copy/print speed A4	Up to 75 ppm
Copy/print speed A3	Up to 37 ppm
Autoduplex speed A4	Up to 75 ppm
1st copy out time	3.6 sec.
Warm-up time	Approx. 22 sec. ⁽²⁾
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–9,999
Original format	A5–A3
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	Chapter; cover and page insertion; proof copy (print and screen); adjustment test print; digital art functions; job setting memory; poster mode; image repeat; overlay (optional); stamping; copy protection

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed.

² Warm up time may vary depending on the operating environment and usage

PRINTER SPECIFICATIONS

Print resolution	1,800 x 600 dpi; 1,200 x 1,200 dpi
Page description language	PCL6 (XL 3.0); PCL 5; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows Vista (32/64); Windows 7 (32/64); Windows 8 (32/64); Windows 10 (32/64); Windows Server 2008 (32/64); Windows Server 2008 R2, Windows Server 2012; Windows Server 2012 R2; Macintosh OS X 10.x; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Print functions	Direct print of PCL, PS, TIFF, XPS, PDF (v1.7), encrypted PDF files and OOXML (DOCX, XLSX, PPTX); mixmedia and mixplex; "Easy Set" job program- ming; overlay; watermark; copy protection; carbon copy print
Mobile Printing	AirPrint (iOS), Mopria (Android), Google Cloud Print (optional), ineoPRINT (iOS & Android), NFC Authentication and Pairing (Android)

SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 240 ipm (mono/colour)
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-E-mail (Scan-to-Me), Scan-to-SMB (Scan-to-Home), Scan-to-FTP, Scan-to-Box, Scan-to-USB, Scan-to-WebDAV, Scan-to-DPWS, Network TWAIN scan
File formats	JPEG; TIFF; PDF; PDF/A 1a and 1b (optional); Compact PDF; encrypted PDF; searchable PDF (optional); XPS; compact XPS; PPTX; searchable DOCX/XLSX (optional); searchable PPTX
Scan destinations	2,100 (single + group); LDAP support
Scan functions	Annotation (text/time/date) for PDF; up to 400 job programs; realtime scan preview

FAX SPECIFICATION

Fax standard	Super G3 (optional)
Fax transmission	Analogue, i-Fax, Colour i-Fax (RFC3949-C), IP-Fax
Fax resolution	Max.: 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,100 (single + group)
Fax functions	Polling; time shift; PC-Fax; receipt to confidential box; Receipt to E-mail/FTP/SMB; up to 400 job programs

USER BOX SPECIFICATIONS

Max. storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication); Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling
User box functionality	Reprint; Combination; Download; Sending (E-mail/FTP/SMB and fax); Copy box to box

SYSTEM FEATURES

Security	ISO 15408/IEEE 2600.2 compliant (in evaluation); IP filtering and port blocking; SSL2; SSL3 and TLS1.0 network communication; IPsec support; IEEE 802.1x support; User authentication; Authentication log; Secure print; Hard disk overwrite (8 standard types); Hard disk data encryption (AES 256); Hard disk mirroring (optional); Memory data auto deletion; Confidential fax receipt; Print user data encryption; copy protection (Copy Guard, Password Copy) optional
Accounting	Up to 1,000 user accounts; Active Directory support (user name + password + E-mail + smb folder); User function access definition; Biometric authentication (finger vein scanner) optional; ID card authentication (ID card reader) optional
Software	store+find (opt.), convert+share (opt.), Personal Applications (opt.), Data Administrator (user accounts & cost centres), Card solutions (opt.), Unix/Linux support, SAP support, EveryonePrint (opt.)



DEVELOP

The Forum Group

p. 1300 036 786
e. info@forumgroup.com.au
w. forumgroup.com.au

Sydney.
Unit 20, 39 Herbert St, St Leonards NSW 2065

Melbourne.
5/10 Duerdin Street, Clayton VIC 3168

Brisbane.
26 Edmondstone Rd, Bowen Hills QLD 4006

Perth.
Suite 1, 28 Belmont Avenue, Belmont WA 6104

All data relating to the paper capacities of the document feeder, the final processing accessories and the paper cassettes apply to paper weighing 80 g/m² unless expressly stated otherwise. All data relating to the speed of printing, scanning or faxing apply to paper of an A4 format weighing 80 g/m² unless expressly stated otherwise.

All data relating to paper weights apply to media that are recommended by Konica Minolta. All technical data correspond to knowledge available at the time of going to print. Konica Minolta reserves the right to make technical alterations.

DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.

All other brand or product names are registered trademarks or product titles of their respective manufacturers. Konica Minolta does not accept any liability or guarantee for these products.